



## Fuse plug with pull-tab; for miniature metric fuses 5 x 20 mm and 5 x 25 mm; with LED indicator; 24 V AC/DC; 6 mm wide

Item No.: 281-512/281-501



---

Fuse plug with pull-tab; for miniature metric fuses 5 x 20 mm and 5 x 25 mm; with LED indicator; 24 V AC/DC; 6 mm wide

### Marking

RoHS ✓  
Compliant

### Business data

Supplier	WAGO
Item no.	281-512/281-501
GTIN / EAN	4050821276265
Content	1

### Notes

Safety information 1: Electrical ratings are given by the fuse and blown fuse indication.

### Technical data

#### Miscellaneous

Safety information 2	Leakage current in case of a blown fuse: LED 5 ... 20 mA
Rated voltage (III / 3) [V]	250 [V]
Rated current [A]	6.3 [A]
Legend (ratings)	(III / 3) Overvoltage category III / Pollution degree 3

Printview: Fuse plug with pull-tab; for miniature metric fuses 5 x 20 mm and 5 x 25 mm; with LED indicator; 24 V AC/DC; 6 mm wide - Item No.: 281-512/281-501

---


<b>Technical data</b>	
<i>Width</i>	<i>6 mm / 0.236 Inch</i>
<i>Marking level</i>	<i>Center marking</i>
<i>Color</i>	<i>gray</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Fire load [MJ]</i>	<i>0.081 [MJ]</i>
<i>Weight [g]</i>	<i>6.679 [g]</i>
<i>Packaging type</i>	<i>BOX</i>
<i>Main product function</i>	<i>Fuse plug</i>
<i>Product type</i>	<i>Function modules</i>

Printview: Fuse plug with pull-tab; for miniature metric fuses 5 x 20 mm and 5 x 25 mm; with LED indicator; 24 V AC/DC; 6 mm wide - Item No.: 281-512/281-501

---

## Images & drawings



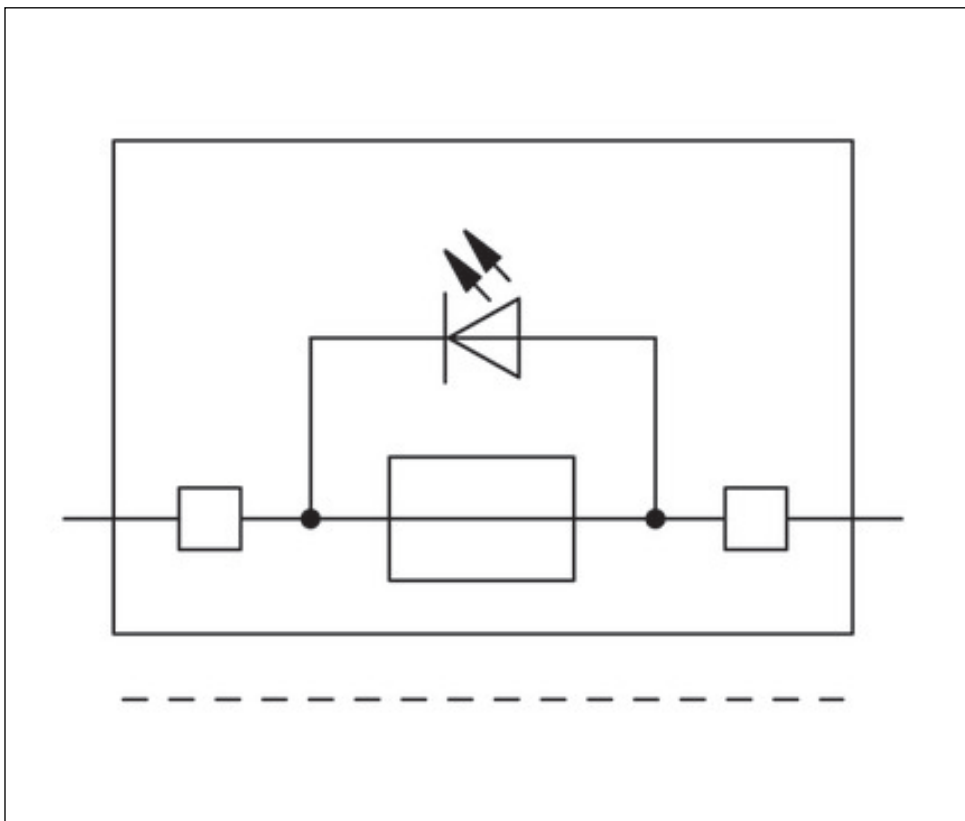

**Address**

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.