



APM Power Meter

For single-phase, split-phase & 3-phase mains networks

EVALUATION KIT AVAILABLE
Contact us to request yours

Advanced Panel Meter (APM)



Programmable dynamic
backlight color



Warning
flash

1%
Accuracy


Combined digital and
bar graph display



Ten user configurable
alarms




Programmable scale
Measure single-, split-
and 3-phase



2 Digital Outputs
1 Analog Output



USB port for custom user settings
via the free easy-to-use software

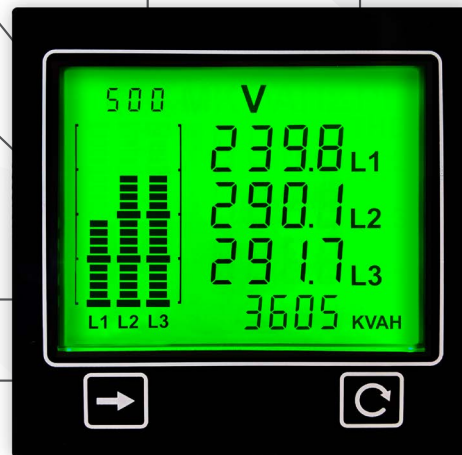

Instantaneous:

- Voltage (L-L and L-N)
- Current (L-L and L-N)
- Reactive Power (VAR)
- Active Power (W)
- Apparent Power (VA)
- Frequency (Hz)
- Power Factor (PF)
- THD Voltage & Current
- % Max Load
- Alarm Status (available on Modbus communication)
- Phase Angle (available on Modbus communication)
- Total Energy (kWh or kVAh)

Networks:

- Single phase, 2-wire
- Single phase, 3-wire (split-phase)
- 3-phase, 3-wire
- 3-phase, 4-wire

Front panel
navigation buttons

Less
than
75mm
deep



Modbus®
RTU over RS485
Connectivity

Key Features

- For single-, split- and 3-phase applications.
- Measures Active (W), Reactive (VAR) and Apparent (VA) power.
- Displays electrical parameters on large, backlit LCD display.
- Features two independent opto-isolated digital outputs plus one analog 4-20mA output.
- Includes MODBUS® RTU communication as standard.
- Provides clear indication of electrical circuit performance.
- User-programmable scale and custom alarm messages display critical parameters and immediately alerts operators when a parameter is out of range.
- Programmable Current Transformer (CT) and Potential Transformer (PT) ratios.

Go to www.trumeter.com/apm for further information

Specifications

NETWORKS MEASUREMENT

Frequency	45 - 65 Hz
Voltage measurement range	L-L 0 - 600VAC L-N 10 - 300VAC
Programmable PT range	1:1 to 1000:1
Current measurement range	0 - 5A
Programmable CT range	1:1 to 1000:1
Accuracy	1% (THD 5%) of full scale

ENVIRONMENTAL

Temperature - operating	-10 to +50°C
Temperature - storage	-40 to +70°C
IP rating (from the front)	IP65, NEMA type 4 and 12 (UL 50)

POWER SUPPLY

Input	100 - 277 VAC
Supply frequency	50-60Hz
Max power	2W

DISPLAY

Backlight colors	Red, Green, White
------------------	-------------------

DIGITAL OUTPUTS

Number	2
Type	Opto-Isolated
Operating modes	Momentary
Max voltage	24VDC
Max sink current	15mA


ANALOG OUTPUTS

Number	1
Analog output	4-20mA


COMMUNICATION	Modbus® RTU over RS485
CERTIFICATION	CE, RoHS, UL, cUL

Wiring Diagrams and Isolation


Single phase 2-wire (1P2W)

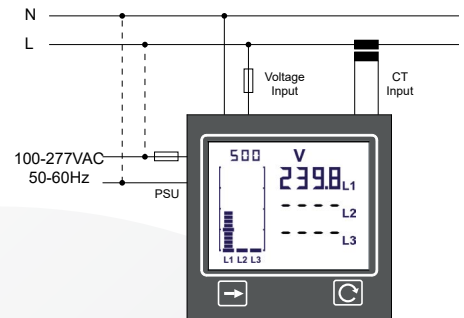


3 phase 3-wire (3P3W)

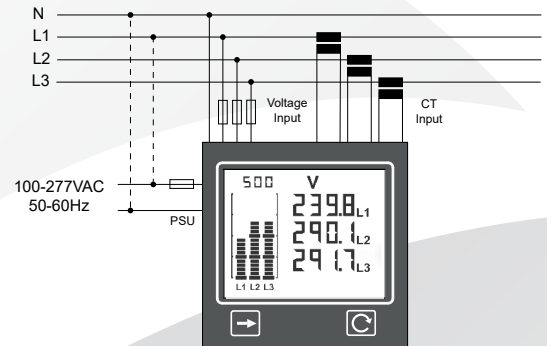

Control Outputs



Isolation




Isolation barriers:
Galvanic
Isolation Barrier

UL US
LISTED
Open-type Measuring
and Testing Equipment
E469767

CE RoHS

Dimensions:

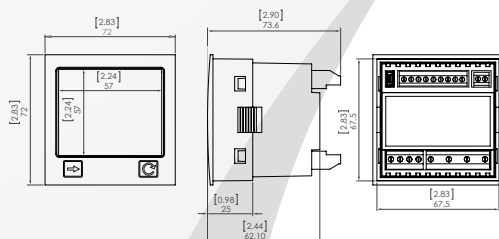

Panel Cutout:
68mm x 68mm
[2.68" x 2.68"] as per
DIN43700/IEC61554

Part Numbers

APM-PWR-APO	APM Power Meter, Positive LCD
APM-PWR-ANO	APM Power Meter, Negative LCD subject to MOQ & extended lead time
029461-01	USB 2.0 (A-Male to Mini-B) Cable 1.8m
024569-11	Power Meter Evaluation Kit

We can **customize our APMs** to match your requirements, adding extra **functionality** or **communication protocols** to suit your needs. If you can't find what you're looking for, **ask about our custom solutions!**

custom
is our passion



www.trumeter.com

Trumeter (The Americas)
6601 Lyons Rd, Suite H-7
Coconut Creek, Florida
FL 33073,
USA
Tel: +1 954 725 6699
Email: sales.usa@trumeter.com

Trumeter (Europe)
Pilot Mill
Alfred Street
Bury,
BL9 9JR
Tel: +44 161 674 0960
Email: sales.uk@trumeter.com

Innovative Design Technologies Sdn. Bhd
Lot 5881, Lorong Iks Bukit Minyak 1
Taman Perindustrian Iks, 14000 Bukit Tengah
Penang, Malaysia
Web: www.idtworld.com
Tel: + 604 5015700
Email: sales.my@idtworld.com