

# LC1D50ABD

TeSys D contactor - 3P(3 NO) - AC-3 - ≤ 440 V 50 A - 24 V DC standard coil



## Main

Range	TeSys
Product name	TeSys D
Product or component type	Contactor
Device short name	LC1D
Contactor application	Motor control Resistive load
Utilisation category	AC-1 AC-3 AC-4
Poles description	3P
Pole contact composition	3 NO
[Ue] rated operational voltage	≤ 690 V AC 25...400 Hz for power circuit ≤ 300 V DC for power circuit
[Ie] rated operational current	50 A (≤ 60 °C) at ≤ 440 V AC AC-3 for power circuit 80 A (≤ 60 °C) at ≤ 440 V AC AC-1 for power circuit
Motor power kW	22 kW at 380...400 V AC 50/60 Hz AC-3 25 kW at 415 V AC 50/60 Hz AC-3 30 kW at 440 V AC 50/60 Hz AC-3 30 kW at 500 V AC 50/60 Hz AC-3 33 kW at 660...690 V AC 50/60 Hz AC-3 15 kW at 220...230 V AC 50/60 Hz AC-3 11 kW at 400 V AC 50/60 Hz AC-4
Motor power hp	3 hp at 115 V AC 50/60 Hz for 1 phase motors 7.5 hp at 230/240 V AC 50/60 Hz for 1 phase motors 15 hp at 200/208 V AC 50/60 Hz for 3 phases motors 15 hp at 230/240 V AC 50/60 Hz for 3 phases motors 40 hp at 460/480 V AC 50/60 Hz for 3 phases motors 40 hp at 575/600 V AC 50/60 Hz for 3 phases motors
Control circuit type	DC standard
[Uc] control circuit voltage	24 V DC
Auxiliary contact composition	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	Conforming to IEC 60947
Overvoltage category	III
[Ith] conventional free air thermal current	80 A at ≤ 60 °C for power circuit 10 A at ≤ 60 °C for signalling circuit
Irms rated making capacity	900 A at 440 V for power circuit conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	900 A at 440 V for power circuit conforming to IEC 60947
[Icw] rated short-time withstand current	100 A 1 s signalling circuit 120 A 500 ms signalling circuit 140 A 100 ms signalling circuit 400 A ≤ 40 °C 10 s power circuit 810 A ≤ 40 °C 1 s power circuit 84 A ≤ 40 °C 10 min power circuit

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

	208 A <= 40 °C 1 min power circuit
Associated fuse rating	100 A gG at <= 690 V coordination type 1 for power circuit 100 A gG at <= 690 V coordination type 2 for power circuit 10 A gG for signalling circuit conforming to IEC 60947-5-1
Average impedance	1.5 mOhm at 50 Hz - lth 80 A for power circuit
[Ui] rated insulation voltage	600 V for power circuit certifications CSA 600 V for power circuit certifications UL 690 V for power circuit conforming to IEC 60947-4-1 690 V for signalling circuit conforming to IEC 60947-1 600 V for signalling circuit certifications CSA 600 V for signalling circuit certifications UL
Electrical durability	1.45 Mcycles 50 A AC-3 at Ue <= 440 V 1.1 Mcycles 80 A AC-1 at Ue <= 440 V
Power dissipation per pole	3.7 W AC-3 9.6 W AC-1
Protective cover	With
Mounting support	Plate Rail
Standards	UL 508 CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1
Product certifications	BV CCC CSA DNV GL GOST LROS (Lloyds register of shipping) RINA UL
Connections - terminals	Control circuit : screw clamp terminals 2 cable(s) 1...2.5 mm <sup>2</sup> - cable stiffness: flexible - with cable end Control circuit : screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> - cable stiffness: flexible - without cable end Control circuit : screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> - cable stiffness: flexible - without cable end Control circuit : screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> - cable stiffness: flexible - with cable end Control circuit : screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> - cable stiffness: solid - without cable end Control circuit : screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> - cable stiffness: solid - without cable end Power circuit : screw connection 2 cable(s) 1...25 mm <sup>2</sup> - cable stiffness: flexible - with cable end Power circuit : screw connection 2 cable(s) 1...25 mm <sup>2</sup> - cable stiffness: solid - without cable end Power circuit : screw connection 2 cable(s) 1...25 mm <sup>2</sup> - cable stiffness: flexible - without cable end Power circuit : screw connection 1 cable(s) 1...35 mm <sup>2</sup> - cable stiffness: solid - without cable end Power circuit : screw connection 1 cable(s) 1...35 mm <sup>2</sup> - cable stiffness: flexible - without cable end Power circuit : screw connection 1 cable(s) 1...35 mm <sup>2</sup> - cable stiffness: flexible - with cable end
Tightening torque	Control circuit : 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit : 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Power circuit : 8 N.m - on EverLink BTR screw connectors - cable 25...35 mm <sup>2</sup> hexagonal 4 mm Power circuit : 5 N.m - on EverLink BTR screw connectors - cable 1...25 mm <sup>2</sup> hexagonal 4 mm

Operating time	16...24 ms opening 42.5...57.5 ms closing
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
Mechanical durability	10 Mcycles
Operating rate	3600 cyc/h at ≤ 60 °C

## Complementary

Coil technology	Built-in bidirectional peak limiting diode suppressor
Control circuit voltage limits	0.1...0.3 Uc drop-out at 60 °C, DC 0.75...1.25 Uc operational at 60 °C, DC
Time constant	34 ms
Inrush power in W	19 W at 20 °C
Hold-in power consumption in W	7.4 W at 20 °C
Auxiliary contacts type	Type mechanically linked (1 NO + 1 NC) conforming to IEC 60947-5-1 Type mirror contact (1 NC) conforming to IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA for signalling circuit
Minimum switching voltage	17 V for signalling circuit
Non-overlap time	1.5 ms on de-energisation (between NC and NO contact) 1.5 ms on energisation (between NC and NO contact)
Insulation resistance	> 10 MOhm for signalling circuit

## Environment

IP degree of protection	IP20 front face conforming to IEC 60529
protective treatment	TH conforming to IEC 60068-2-30
pollution degree	3
ambient air temperature for operation	-5...60 °C
ambient air temperature for storage	-60...80 °C
permissible ambient air temperature around the device	-40...70 °C at Uc
operating altitude	3000 m without derating in temperature
fire resistance	850 °C conforming to IEC 60695-2-1
flame retardance	V1 conforming to UL 94
mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz Vibrations contactor closed 4 Gn, 5...300 Hz Shocks contactor open 10 Gn for 11 ms Shocks contactor closed 15 Gn for 11 ms
height	122 mm
width	55 mm
depth	120 mm
product weight	0.93 kg


## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0001 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

## Contractual warranty

Warranty period	18 months
-----------------	-----------


## Dimensions

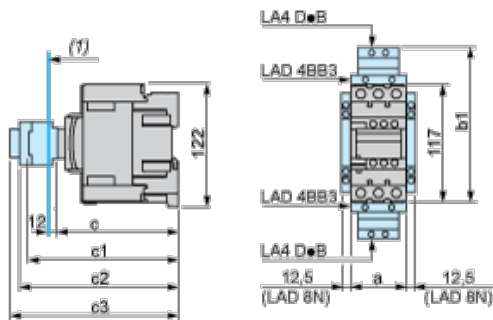

(1) Minimum electrical clearance

LC1		D40A...D65A
a		55
b1	with LAD 4BB3	136
	with LA4 DF, DT	157
c	without cover or add-on blocks	118
	with cover, without add-on blocks	120
c1	with LAD N (1 contact)	–
	with LAD N or C (2 or 4 contacts)	150
c2	with LA6 DK10	163
c3	with LAD T, R, S	171
	with LAD T, R, S and sealing cover	175

## Wiring



## Our Proposal - Type 1 : Circuit Breaker + Contactor for Motor Power 22 kW and 415 VAC

Motor Power (kW)	Icu (kA)	Breaker	Contactor
22	50	 GV3P50	 LC1D50ABD

Non contractual pictures. Type 1 coordination requires that in a short-circuit condition, the contactor or starter must not present any danger to personnel or installations and must not be able to resume operation without repair or the replacement of parts.