



Main

Range of product	Harmony XVC4
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Without
Mounting diameter	40 mm
Component name	XVC
Device short name	XVC
Light source	Green LED steady or flashing Orange LED steady or flashing Red LED steady
Supply circuit type	AC/DC

Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94HB) (top cover)
Mounting location	On base
Product mounting	On base
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
Cable cross section	0.33 mm ²
AWG gauge	AWG 22
Cable length	500 mm
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	75 mA
Flashing frequency	1 Hz
Product weight	0.14 kg
Height	170.5 mm

Environment

standards	EN/IEC 61000-6-2 EN/IEC 61000-6-3
product certifications	UL
protective treatment	TC
ambient air temperature for storage	-35...70 °C
ambient air temperature for operation	-10...50 °C
electrical shock protection class	Class II conforming to EN/IEC 61140
overvoltage category	Class II EN/IEC 61140
IP degree of protection	IP54 in flat surface installation conforming to EN/IEC 60529


Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity
REACH	Reference contains SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

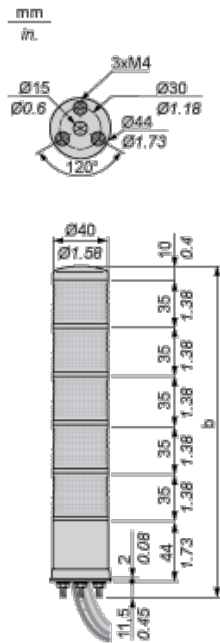

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in)
1 stage	100.50	3.96
2 stages	135.50	5.33
3 stages	170.50	6.71
4 stages	205.50	8.09
5 stages	240.50	9.47

Pre-assembled and Pre-wired Tower Light

Direct Mounting on Horizontal Support

Panel cut-out

