


IMAGE

✓RoHS Compliant



DIMENSIONS







Unit: mm

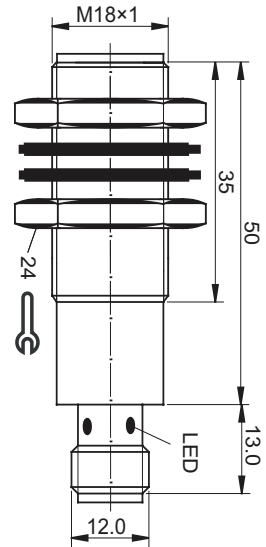

SPECIFICATION


Output	PNP N/O
Installation	Shielded
Connection	Wire
Sensing distance	5.0 mm
Rated operational voltage	24v dc
Supply voltage	10-30v dc
Voltage drop	<2v
Rated insulation voltage	>20 MΩ
Load current capacity	200 mA
Off state current	<15mA
Against polarity reversal	Yes
Short circuit protection	Yes
Load capacity	<1μF
Repeat accuracy	<5%
Ambient temperature range	-25 +70° C
Frequency	2000Hz
Sensing indication	LED
IP rating	67
Housing material	Nickel plated Brass
Sensing face material	ABS plastic
Cable length	2 m
Approvals	CE
Thread size	M18x1.0
Bare wire or Connector type	Connector

WIRING DETAILS






POSITIONING

If used in an area surrounded by metal, Install the proximity Sensor as follows . (S_n = Sensing distance)

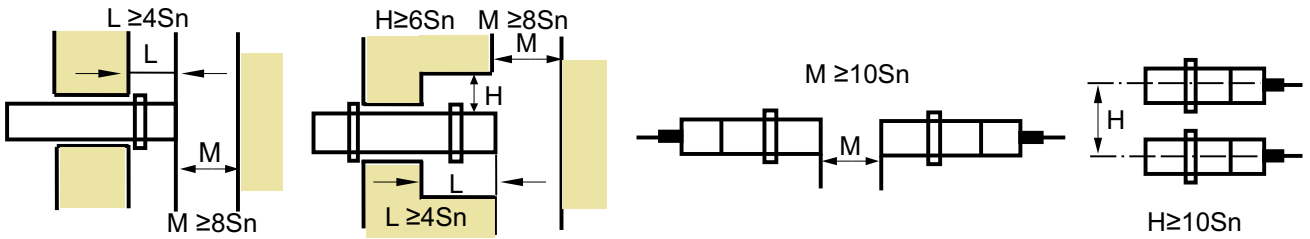

INDUCTIVE PROXIMITY APPLICATION DIRECTION

- Set mounting distance roughly equal to 80% of S_n .
- Set mounting distance roughly equal to 50% of S_n when sensor is used in high frequency or high speed circumstances.
- Mounting distance will change depending on material (iron, stainless steel ,brass, copper and aluminum).

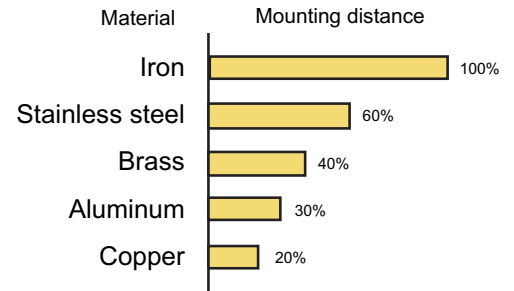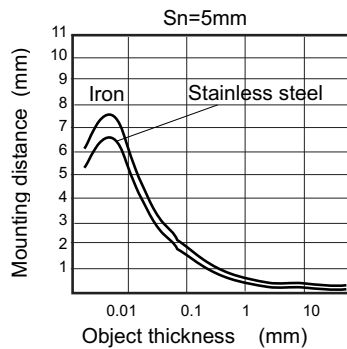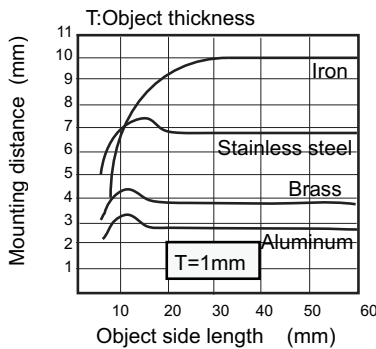

Series connection and parallel connection

