

# Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo




November 2014

# **BF256B N-Channel RF Amplifiers**

### **Features**

- This device is designed for VHF / UHF amplifiers
- Sourced from process 50



# **Ordering Information**

Part Number	Top Mark	Package	Packing Method				
BF256B	BF256B	TO-92 3L	Bulk				

## **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_A = 25^{\circ}\text{C}$  unless otherwise noted.

Symbol	Parameter	Value	Unit
$V_{DG}$	Drain-Gate Voltage	30	V
$V_{GS}$	Gate-Source Voltage	-30	V
I <sub>GF</sub>	Forward Gate Current	10	mA
$T_J, T_{STG}$	Operating and Storage Temperature Range	-55 to 150	°C

## **Thermal Characteristics**

Values are at  $T_A = 25$ °C unless otherwise noted.


Symbol	Parameter	Value	Unit
В	Total Device Dissipation at T <sub>A</sub> = 25°C	350	mW
$P_{D}$	Derate Above 25°C	2.8	mW/°C

# **Electrical Characteristics**

Values are at  $T_A = 25$ °C unless otherwise noted.

Symbol	Parameter	Conditions	Min.	Max.	Unit
V <sub>(BR)GSS</sub>	Gate-Source Breakdown Voltage	$V_{DS} = 0$ , $I_{G} = 1 \mu A$	-30		V
$V_{GS}$	Gate-Source Voltage	$V_{DS} = 15 \text{ V}, I_{D} = 200 \mu A$	-0.5	-7.5	V
V <sub>GS</sub> (off)	Gate-Source Cut-Off Voltage	V <sub>DS</sub> = 15 V, I <sub>D</sub> = 10 nA	-0.5	-8.0	V
I <sub>GSS</sub>	Gate Reverse Current	$V_{GS} = -20 \text{ V}, V_{DS} = 0$		-5	nA
I <sub>DSS</sub>	Zero-Gate Voltage Drain Current	V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 0	6	13	mA
gfs	Common Source Forward Transconductance	$V_{DS} = 15 \text{ V}, V_{GS} = 0,$ f= 1 kHz	4.5		mmhos

# **Physical Dimensions**

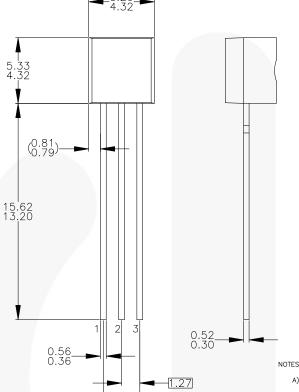

2.54

2 3 

\_4.19 3.05

NOTES: UNLESS OTHERWISE SPECIFIED

- DRAWING WITH REFERENCE TO JEDEC TO-92 RECOMMENDATIONS.
   ALL DIMENSIONS ARE IN MILLIMETERS.
   DRAWING CONFORMS TO ASME Y14.5M-1994.
   TO-92 (92,94,96,97,98) PIN CONFIGURATION:

	ĕ.		92			94			96			97			98	
	₫	Ρ	F	М	Ρ	F	М	В	F	М	Ρ	F	М	Ρ	F	М
	1	Ε	S	S	Ε	S	S	В	D	G	С	G	D	С	G	D
	2	В	D	G	С	G	D	Ε	S	S	В	D	G	Ε	S	S
	3	O	G	D	Φ	D	G	O	G	D	Е	S	S	Ф	D	G
66 13	LE	GEI		POL	AR		E -		MITT	ER		[	) -		RAIN	

M - DMOS C - COLLECTOR G - GATE

E) FOR PACKAGE 92, 94, 96, 97 AND 98:
PIN CONFIGURATION DRAIN "D" AND SOURCE "S"
ARE INTERCHANGEAGLE AT JFET "F" OPTION.
F) DRAWING FILENAME: MKT-ZAO3DREV3.

Figure 1. 3-Lead, TO-92, JEDEC TO-92 Compliant Straight Lead Configuration





#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

 AccuPower™
 F-PFS™

 Awinda®
 FRFET®

 AX-CAP®∗
 Global Power Resource

 Stock
 Stock

BitSiC™ GreenBridge™ Build it Now™ Green FPS™

Current Transfer Logic™ ISOPLANAR™
DEUXPEED® Making Small St

DEUXPEED<sup>®</sup> Making Small Speakers Sound Louder
Dual Cool™ and Better™

EcoSPARK® MegaBuck™
EfficientMax™ MICROCOUPLER™
ESBC™ MicroFET™
MicroPak™

MicroPak2™ Fairchild® MillerDrive™ Fairchild Semiconductor® MotionMax™ FACT Quiet Series™ MotionGrid® FACT<sup>®</sup> FAST® MTi<sup>®</sup> MTx® FastvCore™ MVN® FFTBench™ mWSaver® **FPS™** 

OptoHiT™ OPTOLOGIC<sup>®</sup> OPTOPLANAR®

® PowerTrench® PowerXS™

Programmable Active Droop™

QFET<sup>®</sup>
QS™
Quiet Series™
RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success™

Solutions for Yo SPM® STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-8 SupreMOS® SyncFET™ Sync-Lock™ SYSTEM GENERAL®

TinyBoost®
TinyBuck®
TinyCalc™
TinyLogic®
TINYOPTO™
TinyPower™
TinyPWM™
TinyWire™
TranSiC™

TriFault Detect™
TRUECURRENT®\*

µSerDes™

SerDes"
UHC®
Ultra FRFET™
UniFET™
VCX™
VisualMax™
VoltagePlus™
XS™
Xsens™

仙童™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT <a href="http://www.fairchildsemi.com">http://www.fairchildsemi.com</a>, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OF CIRCUIT DESCRIBED HEREIN, NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

### As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

### PRODUCT STATUS DEFINITIONS

### **Definition of Terms**

Datasheet Identification	Product Status	Definition					
Preliminary First Production  No Identification Needed Full Production  Observed. Not In Production		Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.					
		Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.					
		Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.					
		Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.					

Rev. 172