

UNITED KINGDOM 3-PIN PLUG-IN POWER SUPPLY 15VDC 7.5WATT



SW3521-VI

Features:

- United Kingdom Fixed AC Head
- 1 Year Warranty
- Level VI Efficiency
- CE Approved



Description:

The Stontronics Range of Class II 7.5 Watt AC/DC United Kingdom plug-in power supplies provide 7.5 Watts of continuous power in a compact fixed wall plug enclosure suitable for use in many general power applications.

Specification	
Part Number	SW3521-VI
Input Voltage Range	90-264Vac
Input Frequency Range	47-63Hz
Input Current Rated	0.4A Max.
Output Voltage Rating	15V
Output Current Range	0.5A
Output Min Current	0.01A
Output Connection Type	2.1x5.5x12mm Centre Positive – Straight
Rating Output Power	7.5W
Line and Load Regulation	+/- 5%
Ripple & Noise	150mVp-p
Efficiency	80.26% Min
Over Current Protection	The output shall be protected against the over current conditions.
Short-Circuit Protection	The adapter shall not be damaged by short the DC output to Ground. The adapter shall resume normal operation when a short circuited fault condition is removed.
Operating Temperature	0°C to +50°C
Storage Temperature	-20°C to +80°C
Operating Humidity	10% to 90%
Storage Humidity	10% to 90%
Hi-Pot	3000Vac 5mA 1min
Leakage Current	0.25mA max
Safety Standard	Meet BS EN60950-1 Meet Declared& CE Mark
EMC Standard	FCC part 15: Class B EN55022:2010, Class B EN 55024:2010 EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5
MTBF	50K Hours
Size mm max.	78.98 (L) x 49.5 (W) x 37.7 (H) mm
Weight	110g
Regulator Type	Switched Mode Power Supply


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

UNITED KINGDOM 3-PIN PLUG-IN POWER SUPPLY 15VDC 7.5WATT

SW3521-VI

Diagrams

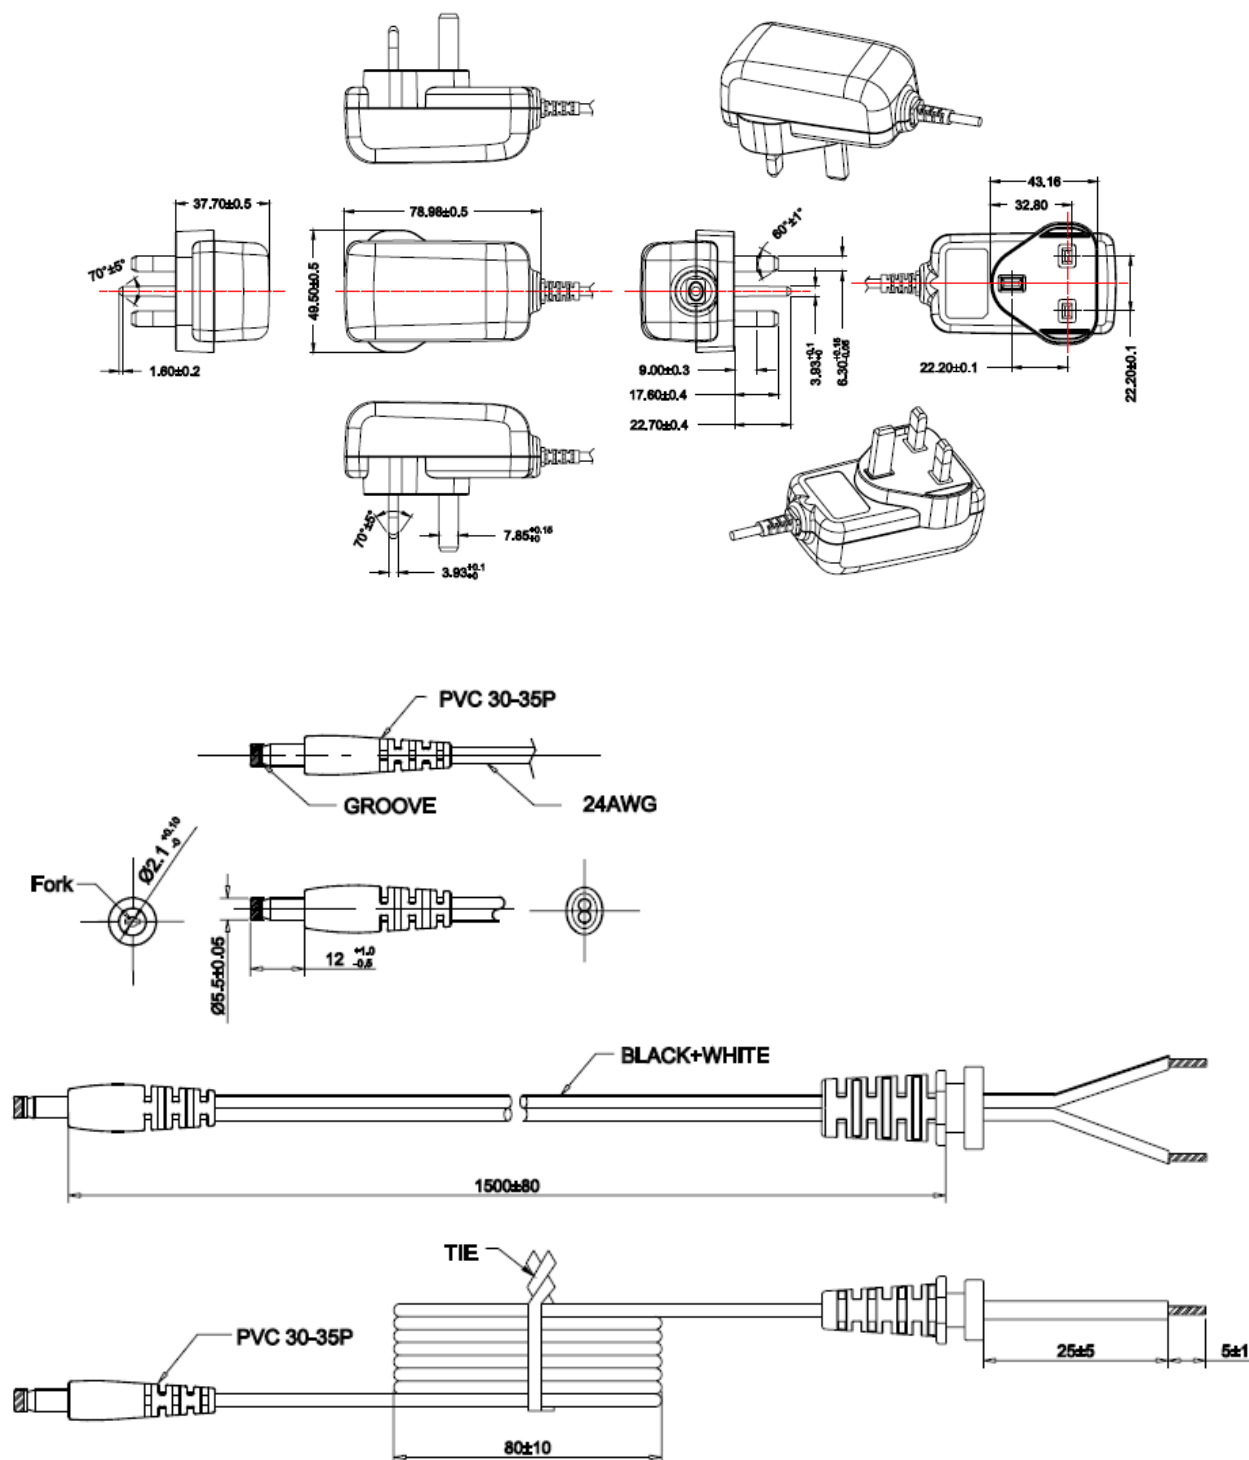

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.