

## Tango 3

#### GSM / GPRS Through Hole Mount Antenna



#### **Key Features**

- · Compact size
- · Flexible connector and cable options
- Wide frequency range
- Panel mounted
- · RoHS compliant

#### **General Description**

The Siretta through hole mount whip antenna combines an efficient performance at 1/4 wave in tri band GSM & GPRS frequencies.

Ideally suited to industrial and automotive applications, it can be mounted to panels up to 4mm thick and is manufactured with an 0 ring seal to prevent moisture ingress once installed. The ruggedised, 2 stage whip element is overmoulded using high grade rubber ensuring years of reliable performance.

The brass foot has a ridged topside allowing secure fitting to the enclosure and a 6mm diameter screw thread for mounting the whip. A wide range of cable and connector options are available with this antenna and are listed overpage.

#### **Additional Considerations**

- 76mm x 29mm including metal foot
- · Allows easy selection and quick integration into target application (please refer to options table below)
- Works with tri band GSM / GPRS devices
- For permanent installations
- Meets all EU compliance criteria for electronic goods

fax



## Tango 3

### GSM / GPRS Through Hole Mount Antenna


#### **Electrical Specifications**

| Temperature range:     | -40 to 85°C                     |
|------------------------|---------------------------------|
| Impedance:             | 50 ohm                          |
| Gain:                  | Unity gain                      |
| VSWR:                  | <2:1                            |
| Operating frequencies: | GSM / GPRS - 900, 1800, 1900MHz |
| Polarization:          | Vertical                        |
| Radiating element:     | ½ wave dipole                   |

#### **Mechanical Specifications**

| Dimensions:      | 76mm x 29mm including brass foot with rubber whip               |
|------------------|---|
| Cable:           | RG58 (For standard lengths please refer to options table below) |
| Connector:       | Please refer to options table below                             |
| Mounting method: | Through hole mount (12mm drill hole diameter)                   |

#### Graph

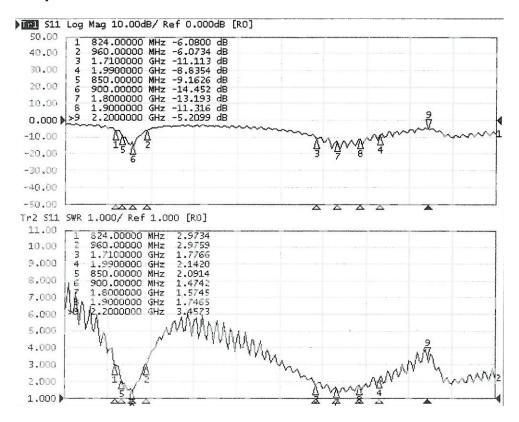



# Tango 3

### GSM / GPRS Through Hole Mount Antenna

#### **Ordering Details**

| Part number                     | Description   |
|---------------------------------|---|
| TANGO3/0.2M/SMAM/S/S/31         | Through Hole Mount GSM / GPRS Antenna, 200mm Cable, SMA Male Connector    |
| TANGO3/0.5M/SMAM/S/S/31         | Through Hole Mount GSM / GPRS Antenna, 500mm Cable, SMA Male Connector    |
| TANGO3/1M/SMAM/S/S/31           | Through Hole Mount GSM / GPRS Antenna, 1m Cable, SMA Male Connector       |
| TANGO3/3M/SMAM/S/S/31           | Through Hole Mount GSM / GPRS Antenna, 3m Cable, SMA Male Connector       |
| TANGO3/5M/SMAM/S/S/31           | Through Hole Mount GSM / GPRS Antenna, 5m Cable, SMA Male Connector       |
| TANGO3/0.2M/FMEF/S/S/31         | Through Hole Mount GSM / GPRS Antenna, 200mm Cable, FME Female Connector  |
| TANGO3/0.5M/FMEF/S/S/31         | Through Hole Mount GSM / GPRS Antenna, 500mm Cable, FME Female Connector  |
| TANGO3/1M/FMEF/S/S/31           | Through Hole Mount GSM / GPRS Antenna, 1m Cable, FME Female Connector     |
| TANGO3/2M/FMEF/S/S/31           | Through Hole Mount GSM / GPRS Antenna, 2m Cable, FME Female Connector     |
| TANGO3/3M/FMEF/S/S/31           | Through Hole Mount GSM / GPRS Antenna, 3m Cable, FME Female Connector     |
| TANGO3/5M/FMEF/S/S/31           | Through Hole Mount GSM / GPRS Antenna, 5m Cable, FME Female Connector     |
| TANGOO/SIVI/T IVILI / 3/3/3/3 T | Throught hole Would down at the Antenna, offi Cable, TWL Female Connector |

fax

web